

VAIBHAV



P.Green



G.Black



Red



R.Black



M.Grey



D.Grey



P.Blue



Camel




D.Brown



L. Brown



Gold

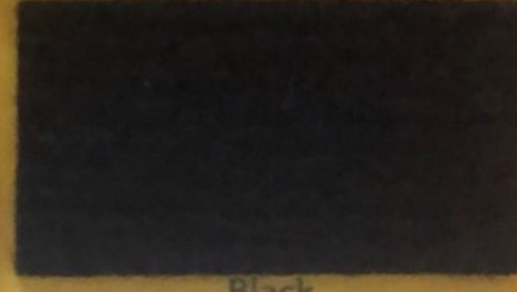

Black

## INSTALLATION

Best results are obtained by ensuring that the floor is clean, level and dry prior to laying. Full adhesion to the floor recommended. The floor covering should be stretched with knee kicker to avoid occurrence of floats.

## CLEANING

Use of vacuum cleaner recommended. Alternatively, use a soft brush.

## SPECIFICATION

Weight (gsm)	: Kaleen : $800 \pm 5\%$
Thickness (mm)	: $3.0 \pm 0.3$
Roll Width	: (i) 1.52 (ii) 1.83 (iii) 3.05 (iv) 3.66
Roll Length	: Approx 35-45 Mtrs.

## SHADE

Shade is as per our standard shade card and subjected to vary according to inherent limitation of dyeing process and technology.

## DON'T

- (i) Do not use any hard brush to clean the carpet.
- (ii) Do not use any underlay.
- (iii) Do not use caster wheels having hardness more than Hardness of CS 10 Wheels.

## PERFORMANCE SPECIFICATIONS

- (i) **Abrasion** : Top Layer sustains complete wear out till 7000 cycles when tested in accordance with BS 3424, ISO : 5470, IS : 12673.
- (ii) **Tensile Strength** : 25Kg/5cm when tested in accordance with IS : 1969.
- (iii) **Color Fastness** : Color Fastness to rubbing in accordance with IS : 766.

Specifications are subjected to change in the spirit of Continual improvement in Process and Technology





