

Elevate Your Workspace Style



CARPET TILES



SUPREME CARPET TILES PDF





AM-521,522





AM-522,521





AM-523,521





AM-524



Specifications

STYLE	SUPREME
Fibre Composition	100% POLYPROPYLENE
Construction	Level Loop
Yarn Type	PP BCF
Dye Method	Solution Dye
Machine Gauge	1/10
Stitch Rate	41/10 cm
Pile Height (±5%)	4 MM
Total Height (±5%)	6.5 MM
Pile Weight (±5%)	550 g/m²
Primary Backing	Non-Woven
Secondary Backing	Pvc reinforced with fibre glass
Pile Treatment	3M Scotch Guard
Size	50 x 50 cm
Tile per box	20 pcs
Area per box	05 sqm
Limited Warranty	05 years
Recommended Installation Patterns	Quarter Turn



PERFORMANCE Specifications

Wear Classification	Moderate/medium/Heavy Commercial
Colour Fastness	Passes
Flammability	Passes
Radiant Flux	Passes
Static Propensity	Passes

SCOTCH GARD

Protection and Stain Release



ISO 9001:2000
Certified Company




ISO 14001:2004
Certified Company




OHSAS
18001:2007


RECOMMENDED INSTALLATION:-




QUARTER
TURNED



HORIZONTAL




HERRINGBONE



RANDOM



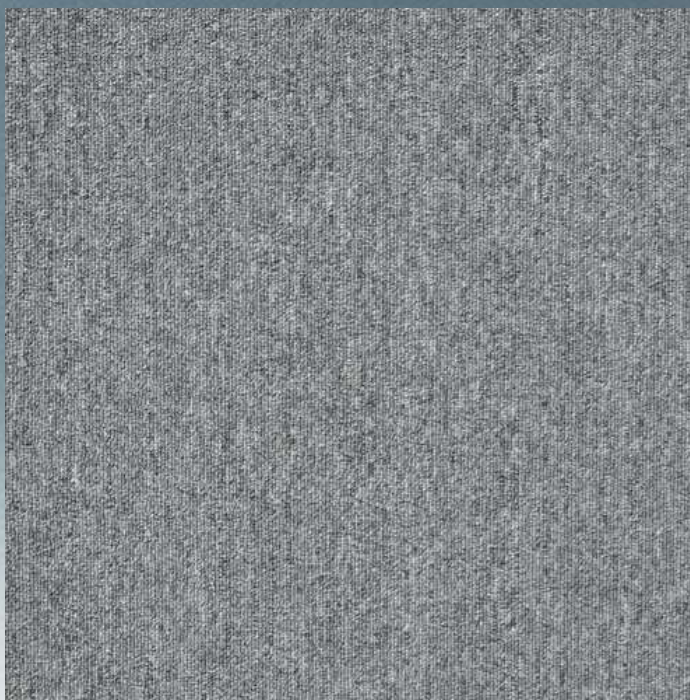

AM-521



AM-522



AM-523



AM-524

Note:-



I) The photos are displaying only the design or pattern.

II) The color of the pasted sample represents only a specific section of the carpet tile.